


# The Seal



**Spec Sheet**

**P:** 1300 596 636  
**E:** [Sales@velopushbikeparkingsolutions.com](mailto:Sales@velopushbikeparkingsolutions.com)  
**W:** [velopushbikeparkingsolutions.com](http://velopushbikeparkingsolutions.com)  
**ABN:** 72672981396

# The Seal – Option 1 -Single Sided Staggered

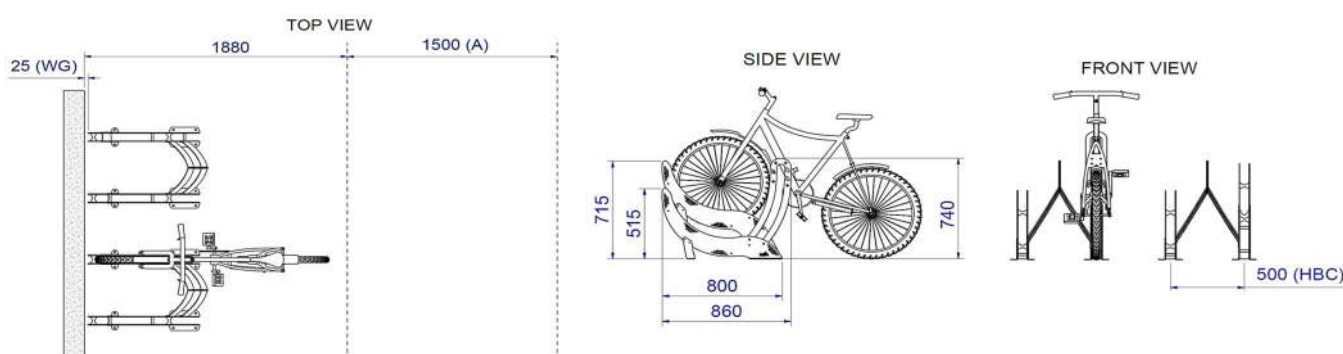

## Description:

Designed and manufactured in Australia for Aussie needs, our stylish and architecturally engineered design makes this product suitable for everywhere. Laser cut innovative manufacturing of this product makes it vandal resistant and user friendly.

## Specifications:

|                               |  |
|-------------------------------|--|
| Ceiling Height required (H):  | minimum <b>1500mm</b>  |
| Total Rack Width (W):         | approx. <b>860mm</b>   |
| Aisle Space (A):              | minimum. <b>1500mm</b> (AS2890.3)                                  |
| Wall Gap (WG):                | minimum. <b>25mm</b>   |
| Horizontal bike center (HBC): | <b>500mm*</b> (Factory Standard, fits approx. <b>1.9 bikes/m</b> ) |

\* **400mm** (minimum practical, fits approx. **2.3 bikes/m**) and other dimensions upon request

## Features:

- Vandal resistance
- Solid Lock-bar
- Different sizes for staggered arrangements

## Material:

Stainless Steel or Mild Steel

## Finishes:

Mill Finish and Powder coated  
Choose from our standard colors, custom colors available at additional charge (see our color chart for options)


## Applications:

Bicycle storage rooms, Recreation centers, Schools, Universities, Colleges,  
Shopping centers, Railways, Parks, Business – town planning compliance.

**Compliant with:**  
**AS2890.3**

**P: 1300 596 636**  
**E: Sales@velopushbikeparkingsolutions.com**  
**W: velopushbikeparkingsolutions.com**  
**ABN: 72672981396**

# The Seal - Option 2 -Double Sided Staggered

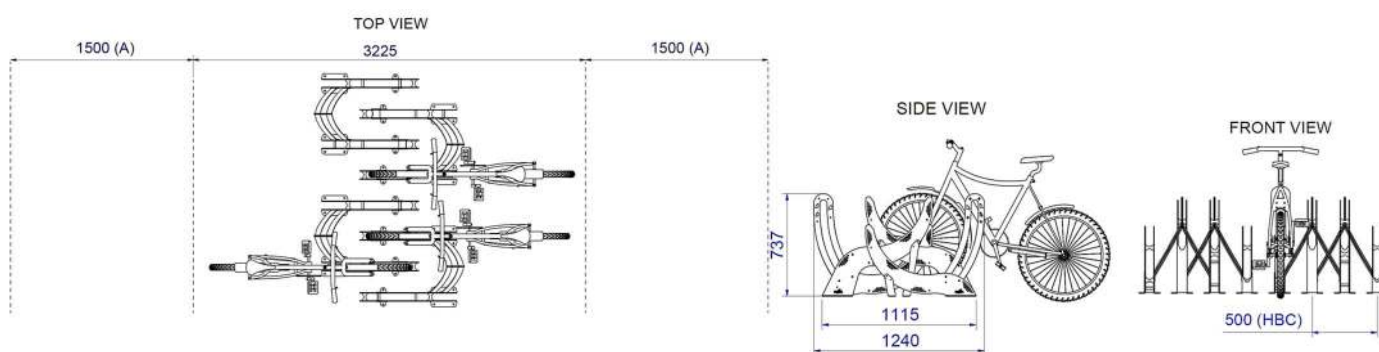

## Description:

Maximizing numbers of bikes to be parked by double sided arrangements.

## Specifications:

|                               |  |
|-------------------------------|--|
| Ceiling Height required (H):  | minimum <b>1500mm</b>  |
| Total Rack Width (W):         | approx. <b>1240mm</b>  |
| Aisle Space (A):              | minimum. <b>1500mm</b> (AS2890.3)                                  |
| Horizontal bike center (HBC): | <b>500mm*</b> (Factory Standard, fits approx. <b>3.7 bikes/m</b> ) |

\* **400mm** (minimum practical, fits approx. **4.5 bikes/m**) and other dimensions upon request

## Features:

- Vandal resistance
- Solid Lock-bar
- Different sizes for staggered arrangements

## Material:

Stainless Steel or Mild Steel

## Finishes:

Mill Finish and Powder coated  
Choose from our standard colors, custom colors available at additional charge (see our color chart for options)


## Applications:

Bicycle storage rooms, Recreation centers, Schools, Universities, Colleges, Shopping centers, Railways, Parks, Business – town planning compliance.

**Compliant with:**  
**AS2890.3**

**P: 1300 596 636**  
**E: Sales@velopushbikeparkingsolutions.com**  
**W: velopushbikeparkingsolutions.com**  
**ABN: 72672981396**

# The Seal - Option 3 -Single Sided Non-Staggered

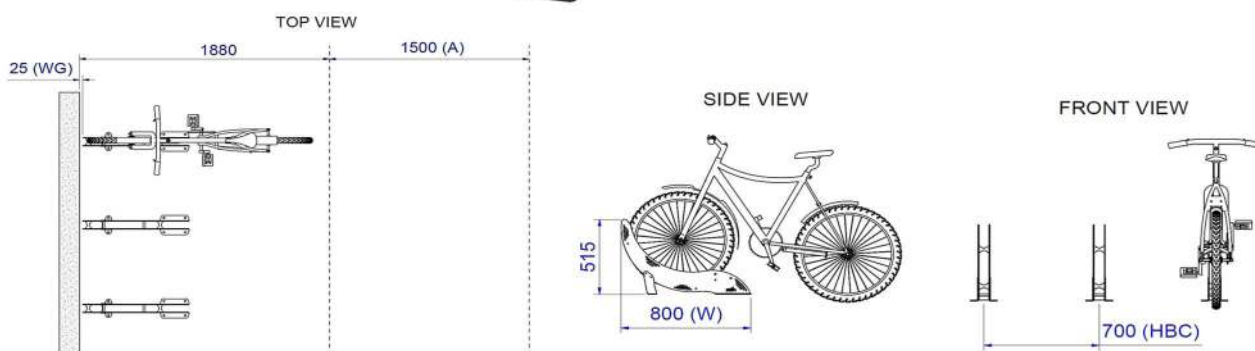

## Description:

For height restrictions or when same size is preferred, non-staggered arrangements are available.

## Specifications:

|                               |  |
|-------------------------------|--|
| Ceiling Height required (H):  | minimum <b>1300mm</b>  |
| Total Rack Width (W):         | approx. <b>800mm</b>   |
| Aisle Space (A):              | minimum. <b>1500mm</b> (AS2890.3)                                  |
| Wall Gap (WG):                | minimum. <b>25mm</b>   |
| Horizontal bike center (HBC): | <b>500mm*</b> (Factory Standard, fits approx. <b>1.9 bikes/m</b> ) |

\* **400mm** (minimum practical, fits approx. **2.3 bikes/m**) and other dimensions upon request

## Features:

Single unit

## Extras:

Solid Lock-bar  
Different sizes for staggered arrangements

## Material:

Stainless Steel or Mild Steel

## Finishes:

Mill Finish and Powder coated  
Choose from our standard colors, custom colors available at additional charge (see our color chart for options)


## Applications:

Bicycle storage rooms, Recreation centers, Schools, Universities, Colleges,  
Shopping centers, Railways, Parks, Business – town planning compliance.

**Compliant with:**  
**AS2890.3**

**P:** 1300 596 636  
**E:** Sales@velopushbikeparkingsolutions.com  
**W:** velopushbikeparkingsolutions.com  
**ABN:** 72672981396

# The Seal - Option 4 -Double Sided Non-Staggered

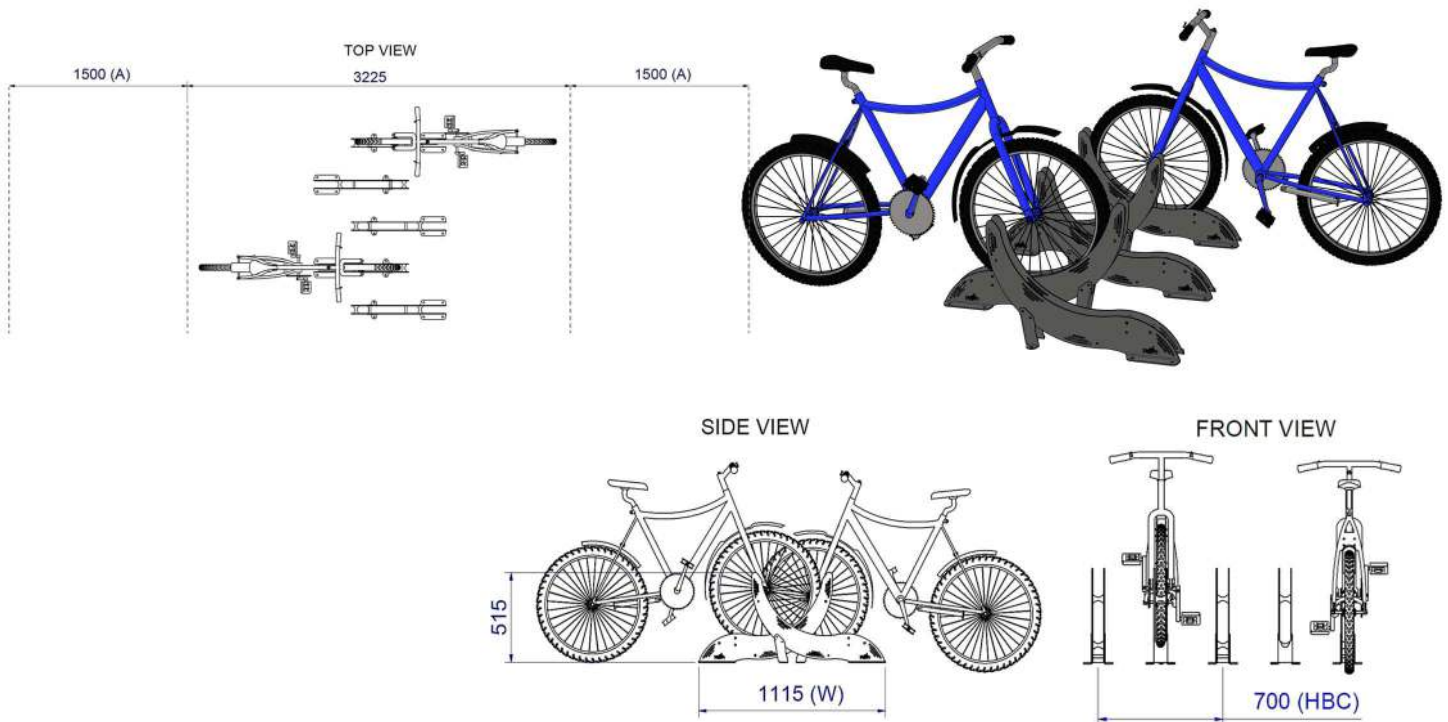

## Description:

Double sided, non-staggered arrangements where applicable.

## Specifications:

|                               |   |
|-------------------------------|---|
| Ceiling Height required (H):  | minimum <b>1300mm</b>   |
| Total Rack Width (W):         | approx. <b>1150mm</b>   |
| Aisle Space (A):              | minimum. <b>1500mm</b> (AS2890.3)                             |
| Horizontal bike center (HBC): | <b>700mm*</b> (AS2890.3) (fits approx. <b>1.7 bikes/1LM</b> ) |

\* 600mm (fits approx. **2.3 bikes/1LM**) and other dimensions upon request

## Features:

Single unit

## Extras:

Solid Lock-bar  
Different sizes for staggered arrangements

## Material:

Stainless Steel or Mild Steel

## Finishes:

Mill Finish and Powder coated  
Choose from our standard colors, custom colors available at additional charge (see our color chart for options)

## Applications:

Bicycle storage rooms, Recreation centers, Schools, Universities, Colleges,  
Shopping centers, Railways, Parks, Business – town planning compliance.

**Compliant with:**  
**AS2890.3**

**P:** 1300 596 636  
**E:** Sales@velopushbikeparkingsolutions.com  
**W:** velopushbikeparkingsolutions.com  
**ABN:** 72672981396

# Additional Information

## Fixing/Anchor:

M10x50 Sleeve Anchor (Dynabolt)  
(Material to match chosen option)

## Foundation material and requirements:

Concrete: min. thickness 100mm and without signs of damage

## Warranty:

Velo-PBPS gives a lifetime warranty on this product, effective from the handover date.  
We warrant that the equipment (and material) complies with the relevant standards at the date of install.  
This warranty is limited and may be excluded in part or in full in case of user damage, misuse, or faulty installation.  
Frequent visual inspections for signs of damage or need for cleaning are recommended.  
Report damaged products.

## Disclaimer:

Images may differ from actual product and specifications may change without prior notice. Velo-PBPS is not liable for the structural integrity of the foundation material and quality and any queries shall be raised with the authorized installer.

## Calculation of bikes/m (bikes per meter):

This calculation shall be used as guide only. Only gives a rough indication. For accurate numbers or how to maximize your space speak to our team.

## Maintenance:

Used components do not require maintenance.  
If any parts appear to be malfunctioning report immediately.

## Cleaning:

Ensure adequate cleaning is carried out during and after installation, such as removal of construction materials like concrete, plaster, and paint splashes.  
Immediate removal prevents use of aggressive cleaning in the future, that may harm the products.  
Regular cleaning shall be carried out with Stainless or Galvanized Steel suitable and approved solutions.

## WARNING:

Use of unsuitable and aggressive solvents may harm the surface and corrosion protection and therefore the appearance of the product.

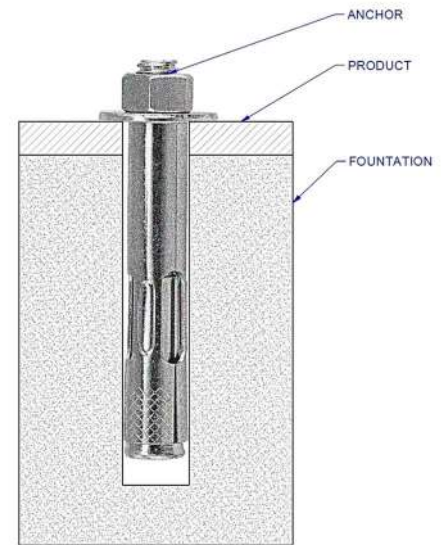


Figure 1: M10x50 DYNABOLT  
(SLEEVE ANCHOR)

Say **velo** for a new Standard  
in Bicycle Parking!



Velo Pushbike Parking Solutions Pty Ltd  
proudly designs, manufactures, and  
operates from Brisbane, Australia.

**P:** 1300 596 636  
**E:** [Sales@velopushbikeparkingsolutions.com](mailto:Sales@velopushbikeparkingsolutions.com)  
**W:** [velopushbikeparkingsolutions.com](http://velopushbikeparkingsolutions.com)  
**ABN:** 72672981396