

Bike Repair Station

velo
PUSHBIKE PARKING SOLUTIONS



Spec Sheet

P: 1300 596 636
E: Sales@velopushbikeparkingsolutions.com
W: velopushbikeparkingsolutions.com
ABN: 72672981396

Bike Repair Station -Specifications



Description:

Bicycle repairs will always be an unfortunate part of cycling. Offering a user friendly and durable one stop station to get you back on the road as quick as possible.

Tools:


Screwdriver-Phillips	Screwdriver – Flat
Spanner 13 & 14	Spanner 15 & 16
Spanner 17 & 18	Alan key set - Metric
Tyre lever I	Alan keys set - Torx
Tyre lever II	

Options:

1. Tools (retractable), Integrated Pump (incl. Schrader & Presta valve, Pressure Gauge and Foot pedal)
2. Tools (free hanging), no pump and gauge

Extras:

- Want Your company branding, or council logo added to this cool design, ask us how.
- Additional signs that can be placed around the area, directing to the station.

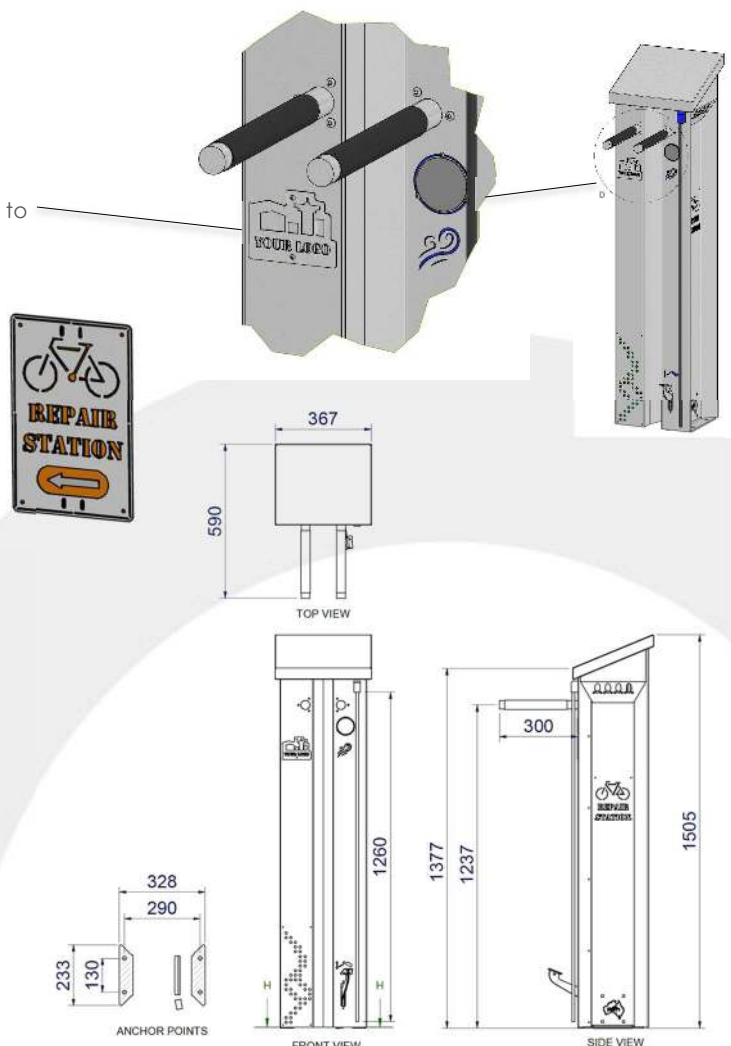

Technical Data

Body Height: approx. **1505mm**
 Body Width: approx. **370mm**
 Body Depth: approx. **310mm (590mm incl. service tubes)**

Weight: approx. **50kg**

Base Plate: 328mm x 233mm

Required Space:

Height: **1500mm**
 Width: **2000mm**
 Depth: **600mm**
 Front Clearance: **1500mm**

Applications:

Bicycle storage rooms, Recreation centres, Schools, Universities, Colleges, Shopping Centres, Railway Stations, Parks, along Bike paths or trails

P: 1300 596 636
E: Sales@velopushbikeparkingsolutions.com
W: velopushbikeparkingsolutions.com
ABN: 72672981396

Additional Information

Material:

Stainless Steel

Finishes:

Stainless Steel Mill finish or powder coated
(see our color chart for standard and custom options)

Fixing/Anchor:

M10x50 Stainless Steel Sleeve Anchor (Dynabolt)

Foundation material and requirements:

Concrete: min. thickness 100mm and without signs of damage

Warranty:

Velo-PBPS gives a 5-year warranty on this product, effective from the handover date.

We warrant that the equipment (and material) complies with the relevant standards at the date of install.

This warranty is limited and may be excluded in part or in full in case of user damage, misuse, or faulty installation.

Frequent visual inspections for signs of damage or need for cleaning are recommended.

Report damaged products.

Disclaimer:

Images may differ from actual product and specifications may change without prior notice. Velo-PBPS is not liable for the structural integrity of the foundation material and quality and any queries shall be raised with the authorized installer.

Maintenance:

Used bearings or rollers do not require maintenance.

If any parts appear to be malfunctioning report immediately.

Cleaning:

Ensure adequate cleaning is carried out during and after installation, such as removal of construction materials like concrete, plaster, and paint splashes.

Immediate removal prevents use of aggressive cleaning in the future, that may harm the products.

Regular cleaning shall be carried out with Stainless Steel suitable and approved solutions.

WARNING:

Use of unsuitable and aggressive solvents may harm the surface and corrosion protection and harm the appearance of the product.

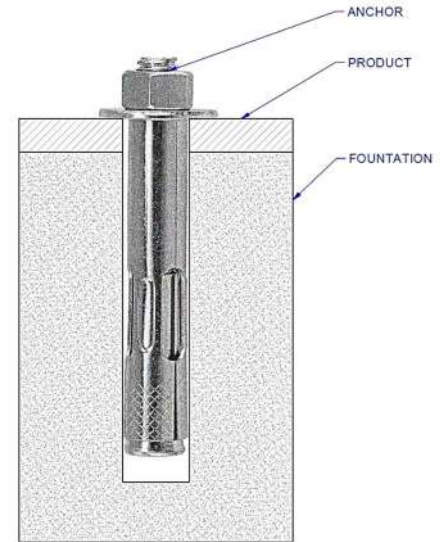


Figure 1: M10x50 DYNABOLT
(SLEEVE ANCHOR)

Say **velo** to a new Standard
in Bicycle Parking!



Velo Pushbike Parking Solutions Pty Ltd
proudly designs, manufactures, and
operates from Brisbane, Australia.

P: 1300 596 636
E: Sales@velopushbikeparkingsolutions.com
E: velopushbikeparkingsolutions.com
ABN: 72672981396