



Electric Bike Pump

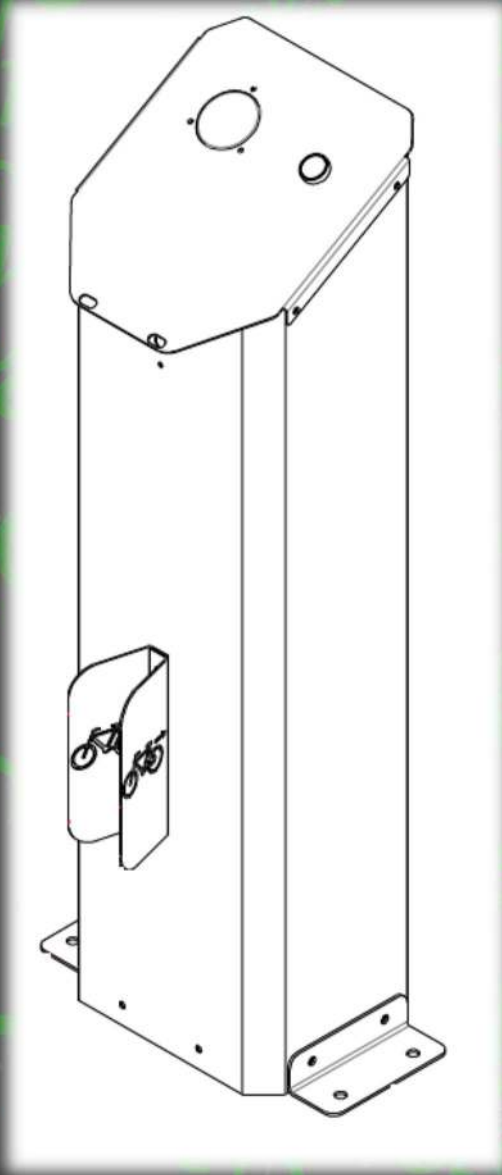

Spec Sheet

P: 1300 596 636
E: Sales@velopushbikeparkingsolutions.com
W: velopushbikeparkingsolutions.com
ABN: 72672981396

Electric Bike Pump - Specifications

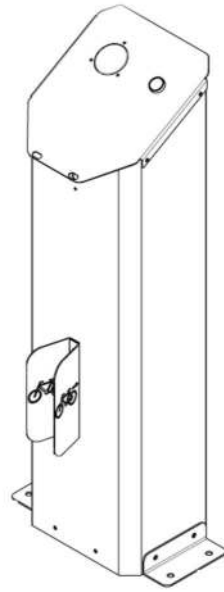

Description:

Your perfect solution to provide User friendly electric tyre inflation. With a Schrader and Presta valve, gauge, and effortless handling makes this a reliable tool with no worries.

Features:

- Electric Pump
- Wheel Catcher
- Schrader & Presta valve
- Pressure gauge
- Plug-in unit

Technical Data:

Body Height: 1005mm
Body Width: 285mm
Body Depth: 270mm

Weight: 10kg

Required Space:

Height: 1500mm
Width: 2000mm
Depth: 400mm
Front Clearance: 1500mm


Base Plate: 270mm x 220mm

Material:

Stainless steel Mill finish
Aluminum (handle and other components)

Applications:

Bicycle storage rooms, Recreation centres, Schools, Universities, Colleges, Shopping centres etc. with access to power.

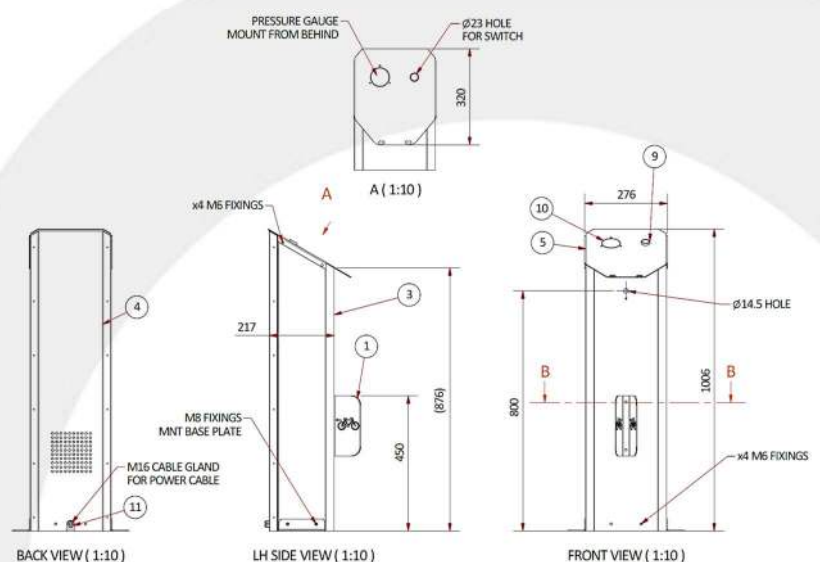

P: 1300 596 636

E: Sales@velopushbikeparkingsolutions.com

W: velopushbikeparkingsolutions.com

ABN: 72672981396

Additional Information

Fixing/Anchor:

M10x50 Stainless Steel Sleeve Anchor (Dynabolt)

Foundation material and requirements:

Concrete: min. thickness 100mm and without signs of damage

Warranty:

Velo-PBPS gives a 5-year warranty on this product, effective from the handover date.

We warrant that the equipment (and material) complies with the relevant standards at the date of install.

This warranty is limited and may be excluded in part or in full in case of user damage, misuse, or faulty installation.

Frequent visual inspections for signs of damage or need for cleaning are recommended.

Report damaged products.

Disclaimer:

Images may differ from actual product and specifications may change without prior notice. Velo-PBPS is not liable for the structural integrity of the foundation material and quality and any queries shall be raised with the authorized installer.

Maintenance:

Used components do not require maintenance.

If any parts appear to be malfunctioning report immediately.

Cleaning:

Ensure adequate cleaning is carried out during and after installation, such as removal of construction materials like concrete, plaster, and paint splashes.

Immediate removal prevents use of aggressive cleaning in the future, that may harm the products.

Regular cleaning shall be carried out with Stainless Steel suitable and approved solutions.

WARNING:

Use of unsuitable and aggressive solvents may harm the surface and corrosion protection and therefore the appearance of the product.

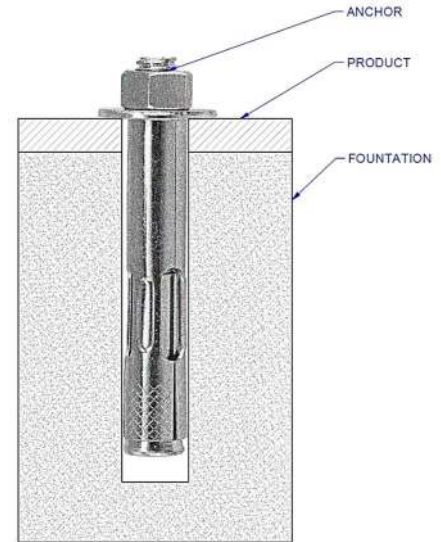


Figure 1: M10x50 DYNABOLT (SLEEVE ANCHOR)

Say **velo** for a new Standard
in Bicycle Parking!



Velo Pushbike Parking Solutions Pty Ltd
proudly designs, manufactures, and
operates from Brisbane, Australia.

P: 1300 596 636
E: Sales@velopushbikeparkingsolutions.com
W: velopushbikeparkingsolutions.com
ABN: 72672981396